



Prover Application Data Sheet

Flow Management Devices | 5225 South 37th Street | Phoenix, AZ 85040

P: +1.602.233.9885 | E: fmd-sales@idexcorp.com | www.flowmd.com

CUSTOMER INFORMATION

Company Name:		Contact Name:
Address:		Phone Number:
		E-mail Address:
End User:	Anticipated Need Date:	Quote Type:

APPLICATION INFORMATION *(Note: The meter information is required for correct sizing and selection of prover model)*

Meter Type:	Meter Size:	Line Size:					
Model Number:		Process Fluid:					
Flow Rate (per meter):	Min:	Nom:	Max:	Units:			
Operating Pressure: Min:	Max:	Design:	Units:	Density: Min:	Max:	Units:	
Viscosity: Min:	Max:	Units:	Temperature: Min:	Max:	Design:	Units:	
Installation Location:			Ambient Temperature (Install Location):			Min:	Max:
Installation Destination: (City, State, Country):							
Installation Climate:		Prover Type:		Agency Approval:			
Hazardous Area Classification:							

PROVER DESIGN INFORMATION *(Note: Please indicate any design preferences, otherwise FMD standard will be used)*

Wetted Materials: 304 SS 316 SS				Inlet/Outlet Flange Configuration - See table 1 (below):			
				**RR, LL, and TT are standard flange options and may have shorter lead times.			
ANSI Flange Rating*:	150#	300#	600#	RR	LL	TT	RL LR 4A
	900#	1500#		Other - Please Specify:			

Flange Type:	Raised Face (RF)	Ring Type Joint (RTJ)	Pressure Class:	ANSI	PED
Prover Power Supply:			Tube Finish:	Wrap	Natural Finish
Comments:					
Water Draw Calibration Units:	Standard Calibration Conditions:				

OPTIONAL KITS: *(Please indicate any kits to be included in the quotation.)*

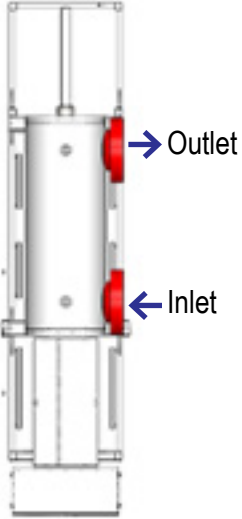
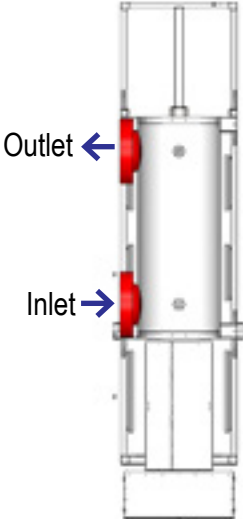
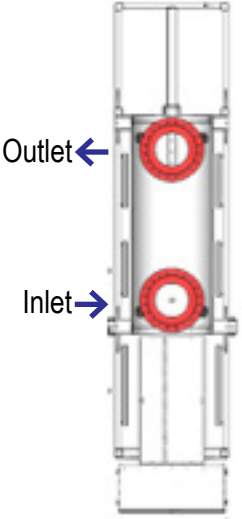
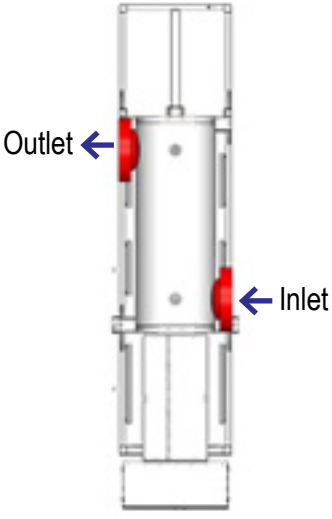
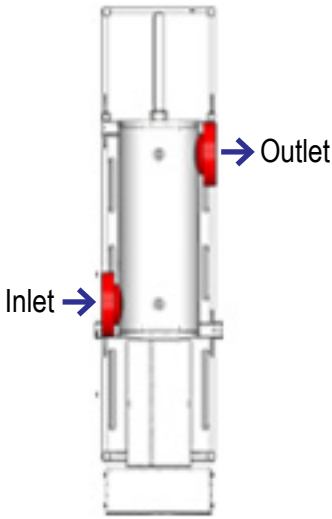
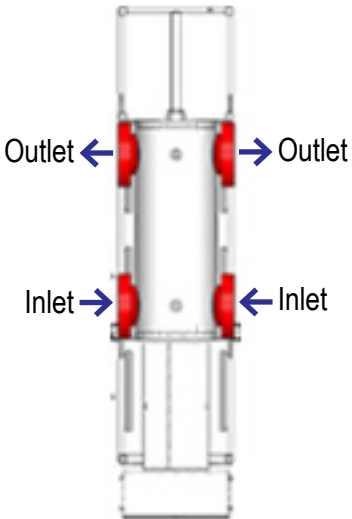
Spare Parts Kit:	Drain Kit:	Insulation Kit:	Thermal Relief Kit:
Leak Detector Kit:	Shaft Seal Monitor Kit:	Spectacle Blind Kit:	Density Kit:
Validation Kit:	Special Tagging:	Tag Numbers:	
PDAQ Kit: (does not include PROVEit Software)			

SPECIAL REQUESTS / ADDITIONAL INFORMATION

--

Prover Application Data Sheet Table 1 - Flow MD Prover Flange Configuration

**Please note: RR, LL, and TT are standard flange configurations and may have a shorter lead time.

<p style="text-align: center;">RR</p> <p style="text-align: center;">Right Inlet - Right Outlet</p> 	<p style="text-align: center;">LL</p> <p style="text-align: center;">Left Inlet - Left Outlet</p> 	<p style="text-align: center;">TT</p> <p style="text-align: center;">Top Inlet - Top Outlet</p> 
<p style="text-align: center;">RL</p> <p style="text-align: center;">Right Inlet - Left Outlet</p> 	<p style="text-align: center;">LR</p> <p style="text-align: center;">Left Inlet - Right Outlet</p> 	<p style="text-align: center;">4A</p> <p style="text-align: center;">Right & Left Inlet Right & Left Outlet</p> 

Flow Management Devices
 5225 South 37th Street | Phoenix, AZ 85040
 P: +1.602.233.9885 | E: fmd-sales@idexcorp.com | www.flowmd.com

